# 65 Inch Smart Interactive Display

## MW3565-U-X







## Features

- 4K UHD anti-glare display delivers images with extreme detail.
- Zero lamination technology with less than 1mm gap between the cover glass and display panel effectively reduces light refraction and brings better visual effect.
- Minimalist geometric line design and smooth border outline, elegant and attractive.
- The 2.0 sound channel speakers deliver high-quality audiovisual effect.
- High-precision infrared touch technology allows up to 32-point touch and 20-point writing.
- Bluetooth 5.0 offers higher data transmission rate and lower power consumption.
- Android 13.0 system offers user-friendly and easy-to-use GUI.
- A variety of quick tools, such as annotation, screenshot, etc., improves usability and interaction efficiency.
- Wireless screen mirroring from various operating systems such as Android, iOS, and Windows to the display with one touch.
- Fast file transfer allows users to quickly transfer files to the display via a QR code.
- OTA remote upgrade allows the system to be upgraded online without backing up data.
- OCR recognition. The whiteboard can automatically recognize text and graphics.

## Specifications

| Model | MW3565-U-X |
|---|---|
| Panel | |
| Panel Size | 65" |
| Resolution | 3840 × 2160 |
| Brightness (cd/m²) | 350 |
| Contrast Ratio | 1200:1 |
| Response Time (ms) | 8 |
| Color Support | 1.07B |

| | |
|---|---|
| Viewing Angle (H/V) | 178°/178° |
| Refresh rate（Hz） | 60 |
| Color gamut | 72% |
| Lifespan | 50000H |
| Surface Hardness | 9H (7 on the Mohs scale) |
| Haze Value | 25% |
| Display Size（mm） | 1428.48 x 803.52 |
| Pixel Pitch (H × V) (mm) | 0.37 x 0.37 |
| System | |
| RAM | DDR4, 4GB |
| ROM | eMMC, 32GB |
| CPU | Amlogic T982 quad-core A55 |
| CPU Frequency | 1.9GHz |
| Operation System | Android 13.0 |
| Touch | |
| Touch Control | Supports 32-point touch, 20-point write |
| Recognizable Object | 5 points, 3mm |
| Touch Precision (mm) | 1 |
| Glass | 4mm tempered glass, 7H (Mohs), anti-glare |
| Touch Response Time (ms) | ≤5 |
| Touch technology | Infrared touch |
| Interface | |
| Video Input | 2 x HDMI IN (4K@60)<br>2 x AV analog video input |
| Video Output | 1 x AV analog video output |
| Audio Output | 1 x earphone, 3.5mm interface |
| Other Interfaces | 1 x SPDIF, 1 x RS232, 1 x USB 3.0, 4 x USB 2.0, 1 x USB Type-C, 2 x TOUCH OUT |
| Network | 1 x RJ45, supports 10M/100M Base-T self-adaptive |
| General | |
| Operating Voltage | AC 100V to 240 V, 50/60 Hz |
| Overall Power Consumption (W) | 185 |
| Product Dimensions (W × H × D) (mm) | 1500.6 x 886.8 x 115.7 |
| Package Dimensions (W × H × D) (mm) | 1615.8 x 1011.9 x 220 |
| Operating Temperature | 0°C to 50°C |
| Operating Humidity | 10% to 90% RH (noncondensing) |
| Accessories Included | 1 x power cable, 2 x touch pen, 1 x quick guide, 1 x wall mount bracket, 1 x infrared remote control, 3 x rod antenna |
| Weight (kg) | Net weight: 36 (Without camera)<br>Gross weight: 47 (Without camera) |
| Audio | |
| Speaker | 2.0 sound channel<br>Left channel: 1 x 15W, 8Ω<br>Right channel: 1 x 15W, 8Ω |

| | |
|---|---|
| Wi-Fi | |
| Wi-Fi Configuration | Built-in dual-frequency Wi-Fi 5 module<br>Supports AP and station modes |
| Wi-Fi Performance | Up to 20m transmission distance in open space |
| Bluetooth | |
| Bluetooth Version | 5.0 |
| OSD | |
| Multi-Language | 23 (Simplified Chinese, Traditional Chinese, Japanese, German, English, Spanish, French, Italian, Portuguese, Russian, Korean, Vietnamese, Ukrainian, Hungarian, Polish, Thai, Arabic, Kazakh, Bulgarian, Galician, Catalan, Uzbek, Indonesian) |
| VESA | |
| Wall Mount Hole (mm) | 500 x 400 |
| Wall Mount Screw | 4-M8 screw hole, hole depth 20mm |
| Certification | |
| Certification | CE, FCC |

# Dimensions

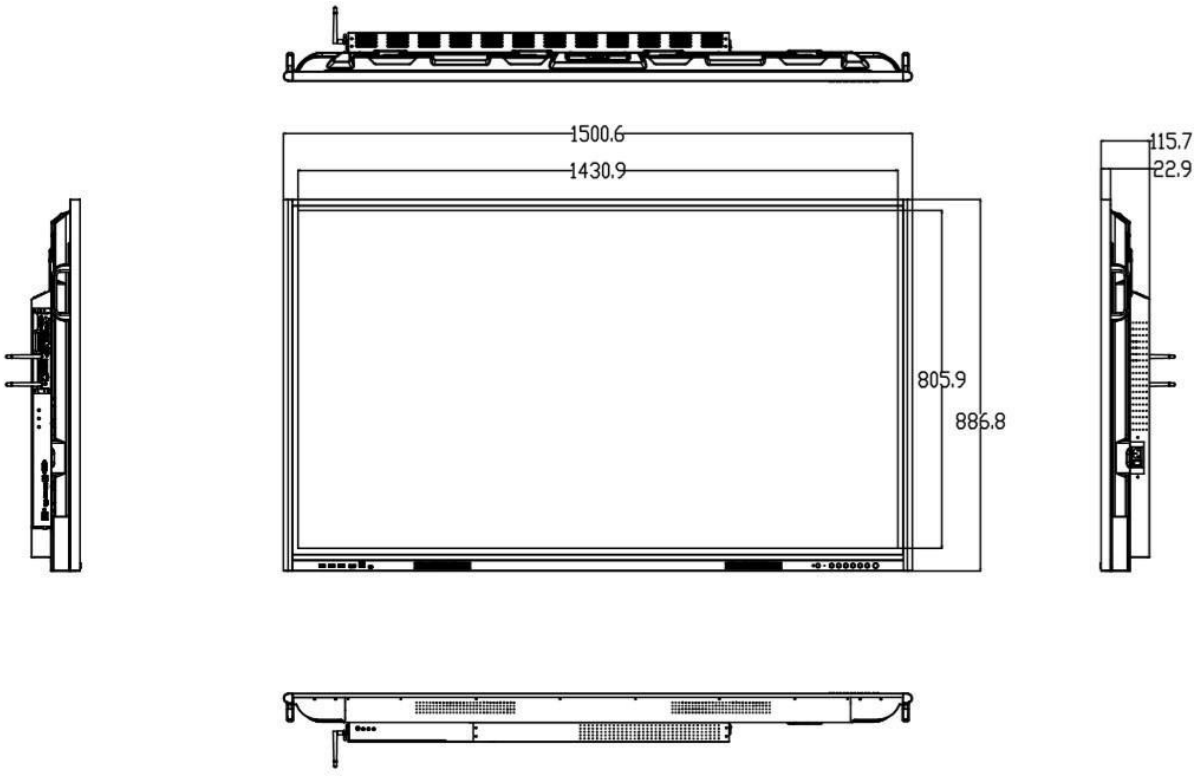

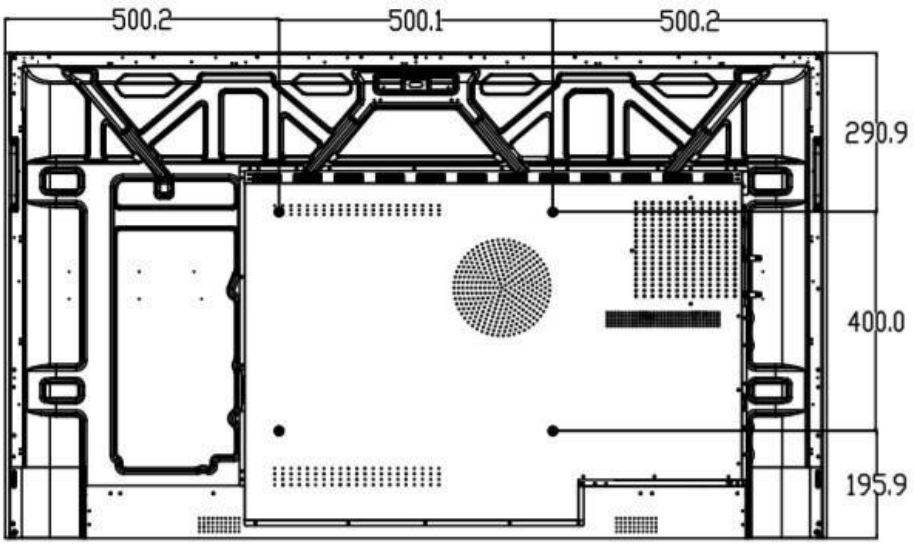


## Interface

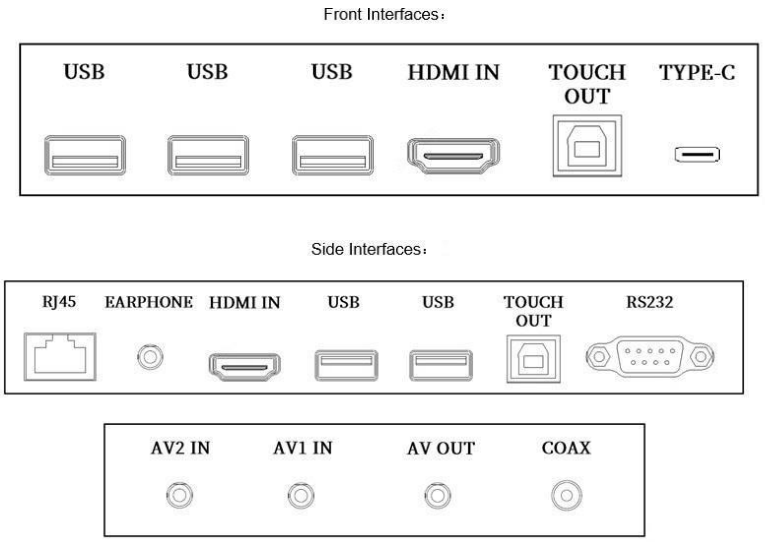


## Ordering Information for Optional Accessories

| Model | Remarks |
|---|---|
| HB-7199-TP | Wireless Screen Sharing Dongle |
| HB-7099-M | Pluggable PC module with i5 processor (Windows 10, not activate d) |
| HB-7099-S | Pluggable PC Module with i7 Processor (Windows 10, not activate d) |
| HB-T-FMC | 65-86-inch Smart Interactive Display Mobile Stand |

# Ordering Info

| Product Model | Description |
|---|---|
| MW3565-U-X | 65 Inch Smart Interactive Display |

**Zhejiang Uniview Technologies Co., Ltd.**
No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China
Email: overseasbusiness@uniview.com; globalsupport@uniview.com
http://www.uniview.com
©2024-2025 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.
*Product specifications and availability are subject to change without notice.
*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.